

Presenting


 **3 CORE FLAT SUBMERSIBLE CABLES** 



POLYCAB

Connection Zindagi Ka



POLYCAB SPECIAL 3 x 2.5 SQ MM 1100V IS : 694  CML-7829495 POLYCAB DAMAN

- Tough & flexible cable provides safety
- Excellent moisture & weather resistance
- Best quality of electrolytic grade copper saves power
- High abrasion resistant special grade PVC
- Available in wide temperature range: - 15°C to 70°C
- Available in various sizes

3 CORE FLAT CABLES FOR SUBMERSIBLE PUMP MOTORS


Polycab Special 3 Core Flat Cables are manufactured for critical space requirement, protection against indefinite immersion in water under specified conditions, protection against rain-water and against ingress of small solid foreign bodies.

Polycab Special 3 Core Flat Cables are produced from best quality electrolytic copper, which is drawn, annealed on-line and bunched on automatic machines to ensure flexibility and uniform resistance. The conductors are insulated with a special grade of PVC on sophisticated co-extrusion lines. Outer sheath consists of highly abrasion resistant PVC compound impervious to grease, oil and water etc.

'POLYCAB SPECIAL' – 3 Core Flat Cables (as per IS 694 : 1990 – ISI marked)

Conductor		Insulation Thickness (Nom.) mm	Sheath		Conductor Resistance @ 20 C (Max.) Ohms/km	Current Carrying Capacity @40 C Amps
Area (Nom.) Sq. mm	No./dia. of strands mm		Overall dimensions			
		Thickness (Nom.) mm	Size (Approx.) (W x T) mm	Conductor Resistance @ 20 C (Max.) Ohms/km	Current Carrying Capacity @40 C Amps	
1.5	22/0.3	0.8	1.1	11.6 x 5.5	12.10	16
2.5	36/0.3	0.9	1.2	13.9 x 6.4	7.41	22
4.0	56/0.3	1	1.3	16.1 x 7.1	4.95	29

Note : Insulation thickness, Sheath thickness and Overall Dimensions given in this table are nominal values. The strand diameter is nominal. However, Construction of the conductor is designed to satisfy the requirement of conductor resistance as per IS 8130 :1984.

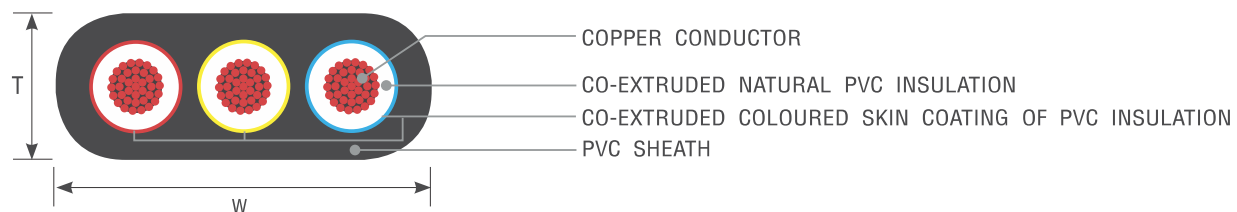

'POLYCAB SPECIAL' – 3 Core Flat Cables (generally conforming to IS : 694)


Conductor		Insulation Thickness (Nom.) mm	Sheath		Conductor Resistance @ 20 C (Max.) Ohms/km	Current Carrying Capacity @40 C Amps
Area (Nom.) Sq. mm	No./dia. of strands mm		Overall dimensions			
		Thickness (Nom.) mm	Size (Approx.) (W x T) mm	Conductor Resistance @ 20 C (Max.) Ohms/km	Current Carrying Capacity @40 C Amps	
6	84/0.3	1.1	1.4	18.6 x 8.0	3.30	37
10	80/0.4	1.3	1.6	23.4 x 10.0	1.91	51
16	126/0.4	1.4	1.8	27.0 x 11.4	1.21	68
25	196/0.4	2	2.2	35.4 x 15.0	0.78	86
35	276/0.4	2.1	2.2	39.3 x 16.3	0.554	110
50	396/0.4	2.2	2.4	45.7 x 18.5	0.386	145

Note : 3 Core x 70 sq. mm & 3 Core x 95 sq. mm Flat Cables are available on request

'POLYCAB' – 3 Core Flat Cables (as per IS 694 : 1990 – ISI marked)

Polycab 3 Core Flat Cables are having the same features of Polycab Special Submersible Cables as given above. These are having minimum insulation and sheathing thicknesses as specified in the IS 694 : 1990.

Conductor		Insulation		Sheath		Conductor Resistance @ 20 C (Max.) Ohms/km	Current Carrying Capacity @40 C Amps
Area (Nom.) Sq. mm	No./dia. of strands mm	Thickness (Nom.) mm	Core dia. (Nom.) mm	Overall dimensions			
				Thickness (Nom.) mm	Size (Approx.) (W x T) mm	Conductor Resistance @ 20 C (Max.) Ohms/km	Current Carrying Capacity @40 C Amps
1.5	22/0.3	0.6	2.8	0.9	11.0 x 5.0	12.10	16
2.5	36/0.3	0.7	3.4	1.0	13.0 x 6.0	7.41	22
4.0	56/0.3	0.8	4.1	1.0	15.3 x 6.7	4.95	29


POLYCAB
Connection Zindagi Ka

Corporate office :

Polycab House, 771, Mogul Lane, Mahim (W), Mumbai 400 016.

E-mail : enquiry@polycab.com • Website : www.polycab.com • Customer care number : 1800 267 0008.

Join us on :

 www.facebook.com/PolycabInd |  www.twitter.com/PolycabIndia |  www.linkedin.com/company/Polycab