




RECESS MOUNTING LED DOWNLIGHTER
 "DOVEE PRO"
 BZSLO 15W WH/NW PRO

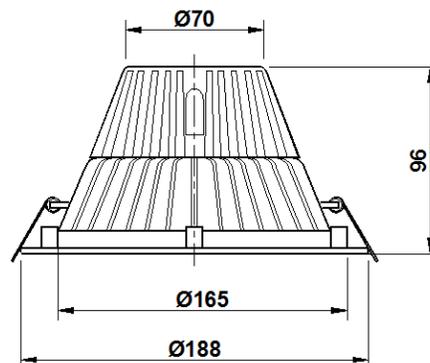

CUTOUT REQUIRED IN CEILING: Ø170mm

NOMINAL DIMENSIONS IN mm Tolerance +/-2

Application

- Retail showrooms,
- Gallery, Museum,
- Shopping malls,
- Show windows,
- Architectural lighting in modern offices, etc.

Specification

- White powder coated die-cast aluminium housing.
- LED chips mounted on MCPCB, pasted on die-cast housing.
- Luminaire is available with different color temperature: White (WH) : 5700K \pm 300K
Neutral White (NW): 4000K \pm 275K
- Specially designed flat opal diffuser fixed to housing with engg. Plastic front cover.
- Driver (BGDZ 24 520) installed on cast aluminium housing and prewired upto the terminal block.
- Spring loaded clips provided for easy installation.
- Ingress protection : IP20

Electrical Data

Product Code	Cat. Ref.	System Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Power Factor
112124	BZSLO 15W WH PRO	15W	240	0.06	0.95
112125	BZSLO 15W NW PRO	15W	240	0.06	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	29-01-2015	FOR –
	CHECKED	SD		REV - 1 DATE-22-02-2018
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BZSLO 15W WH/NW PRO - 01
BAJAJ ELECTRICALS LIMITED LUMINAIRES BU, 601, RUSTOMJEE ASPIREE, SION, MUMBAI-400 022.				* E-mail : luminaires@bajajelectricals.com