




RETAIL LIGHTING

"Flexitron Viva"

BLTRU 20W WH / NW / WW VIVA

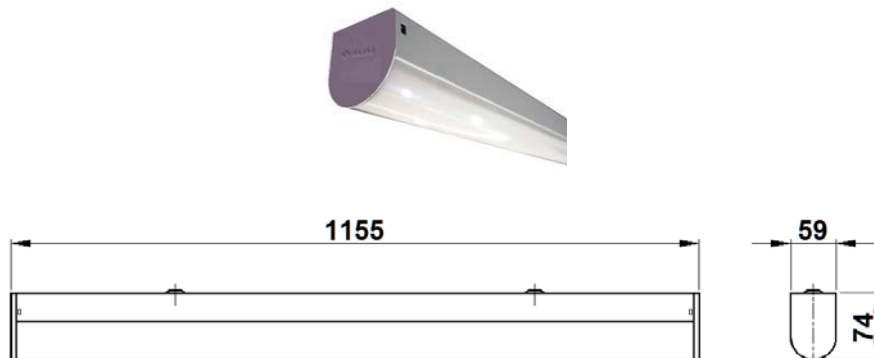

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Passage, corridor lighting (ESP. IT, ITES)
- Premium & Mini offices
- Shopping malls
- Consultancy rooms
- Reception areas
- Hospitality industry

Specification

- CRCA steel sheet housing comprising of White (WH) / Neutral White (NW) / Warm White (WW) LED's connected in series parallel.
- Opal diffuser is supported by a pair of engg. Plastic end plates which facilitate easy removal for maintenance.
- Driver: Constant current output driver, operating range 150 – 275V AC supply voltages.
- The luminaire is suitable for wall or ceiling mounting.
- Finish: White powder coated (RAL 9016)

Electrical Data

Product Code	Cat. Ref.	Total System Wattage (W)	Nominal Voltage (V)	Mains Current in Milli Amps. At 240 V	Power Factor
112176	BLTRU 20W WH VIVA	20	240	80	0.95
112177	BLTRU 20W NW VIVA	20	240	80	0.95
112178	BLTRU 20W WW VIVA	20	240	80	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	SP	27-02-2015	FOR –
	CHECKED	SD		REV - 0 DATE-16-03-2015
	APPROVED	SC		DRG.No
	DATA SHEET RELEASED ON DT-			BLTRU 20W WH VIVA - 01
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : luminaires@bajajelectricals.com