




## RETAIL LIGHTING

"Flexitron Viva"

BLTRU 80W WH / NW VIVA

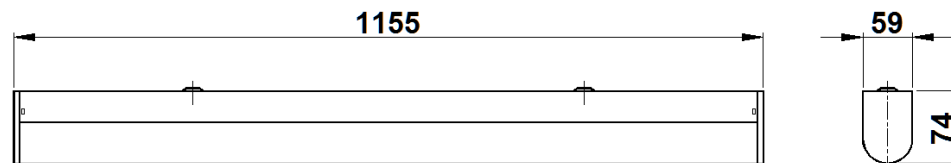

NOMINAL DIMENSIONS IN mm Tolerance +/-5

## Application

- Passage, corridor lighting (ESP. IT, ITES)
- Premium & Mini offices
- Shopping malls
- Reception areas
- Hospitality industry

## Specification

- CRCA steel sheet housing comprising of White (WH) / Neutral White (NW) LED's connected in series parallel.
- Opal diffuser is supported by a pair of engg. Plastic end plates which facilitate easy removal for maintenance.
- Driver: Constant current output driver, operating range 150 – 275V AC supply voltages.
- The luminaire is suitable for wall or ceiling mounting.
- Finish: White powder coated (RAL 9016)

## Electrical Data

Product Code	Cat. Ref.	System Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Power Factor
112189	BLTRU 80W WH VIVA	80W	240	0.325	0.95
112307	BLTRU 80W NW VIVA	80W	240	0.325	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	KPM	08-03-2015	FOR –
	CHECKED	SD		REV - 0 DATE-13-05-2015
	APPROVED	SC		DRG.No
	DATA SHEET RELEASED ON DT-			<b>BLTRU 80W WH VIVA - 001</b>
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>