


SUSPENDED MOUNTING LED UP/DOWN LUMINAIRE

BZSUDL 60W 4F7U3D WH

60W LED Up/down Luminaire

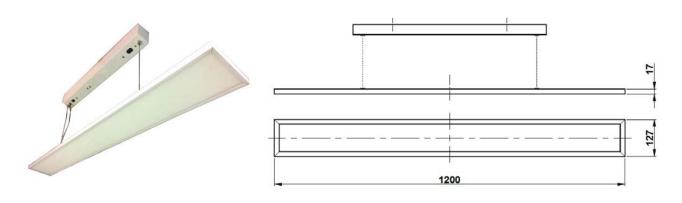

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

Suspended mounting LED luminaire suitable for interior illumination of:

- Commercial offices, Board Rooms,
- COE cabins, Banks, Computer centers, etc.

Specification

- Energy efficient suspended mounted up/down LED flat panel in White (WH) color with sideemitting LED array.
- Luminaire is available with color temperature: White (WH): 5700K
- Extruded aluminium housing contains LED source. Has a high efficiency PS diffuser, which provides higher lumen package (70% up and 30% down ratio) to create uniform & diffuse appearance.
- LED Driver: Non-integral highly efficient constant current electronic driver, input operating voltage range 140–265V AC; provided with overvoltage, short circuit protections.
- Mounting type: Suspension mounting through 'Y' Type suspension.
- Finish: White powder coated.
- Ingress Protection: IP20

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V) & Freq. (Hz.)	System Wattage (Watts)	Mains Current in Amps. At 240 V	Power Factor
112760	BZSUDL 60W 4F7U3D WH	230V, 50Hz	60	0.27	>0.95

Data subject to variation due to change/improvement in the design, materials and processes.

