




COMMERCIAL LED LIGHTING

Round recess mounting LED downlight

BPSLR 18W WH/WW/NW

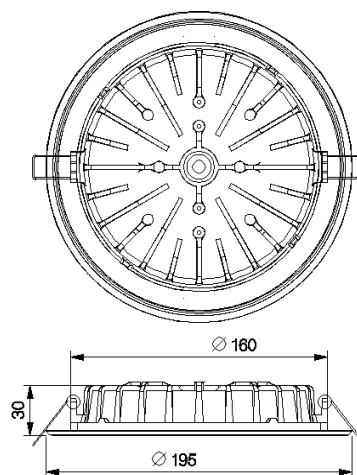

Cut-Out required in ceiling: Ø168mm

Nominal dimensions in mm Tolerance +/-5

Applications

- Shopping malls
- Retail show rooms
- Gallery, Museum,
- Architectural lighting in modern offices
- Hospitality etc.

Specification

- White color plastic round recessed mounted non-integral down lights for soft down lighting.
- Construction in engg. plastic housing & frame.
- High power LED chips mounted on MCPCB, Fixed on engg. Plastic housing.
- Luminaire is available with different color temperature: White (WH) : 5700K
Neutral white (NW) : 4000K
Warm white (WW) : 3000K
- Specially designed flat opal diffuser fixed to housing & frame.
- SS spring loaded clips provided for easy installation.
- Constant current external LED driver is provided separately in engg. Plastic housing.

Electrical Data

Product Code	Cat. Ref.	Lamp Type	Nominal Voltage (Vac)	Mains Current In Amps. At 240 V	Power Factor
112677	BPSLR 18W WH	LED	240	0.080	>0.95
112678	BPSLR 18W WW	LED	240	0.080	>0.95
112679	BPSLR 18W NW	LED	240	0.080	>0.95

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	VDS	09-08-2016	FOR –
	CHECKED	SD		REV - 0 DATE–09-08-2016
	APPROVED	DVRS		DRG.No
	DATA SHEET RELEASED ON DT-			BPSLR 18W WH-NW-NW - 001
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				
* E-mail : luminaires@bajalelectricals.com				