




2' x 2' RECESS LED LUMINAIRE

BZRSQL 36W GZ1 WH / NW / CW

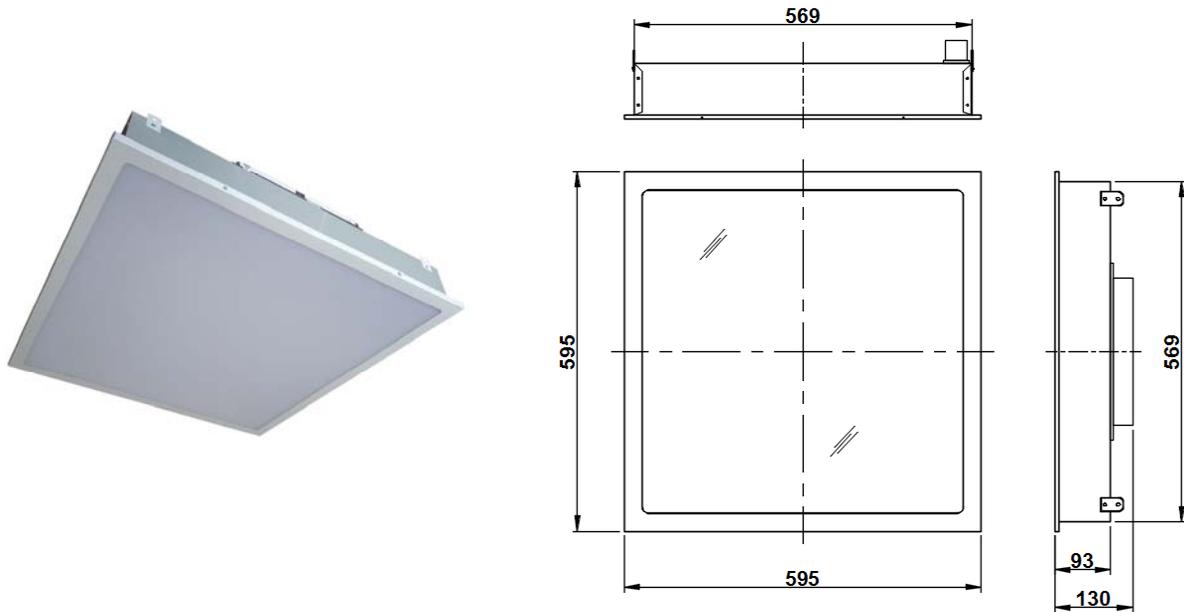

NOMINAL DIMENSIONS IN mm Tolerance +/-2

Application

Recess mounting LED luminaire suitable for interior illumination of:

- Commercial complexes, Showrooms,
- Airport lounges, computer centers,
- Banks, Hospitals, Conference halls,
- Design offices, Control rooms, Laboratories, etc.

Specification

- PPGI (pre-painted galvanised iron) sheet steel housing comprising of LED's connected in series parallel.
- Luminaire is available with different color temperature: White (WH) : 5700K
Neutral White (NW): 4000K
Cool White (CW): 6500K
- Opal diffuser fixed in separate white powder coated sheet steel frame.
- Opal diffuser frame is held in with housing by screws for easy maintenance.
- Driver: Constant current output driver, operating range 150–265V AC supply voltages.
- Ingress Protection : IP20

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	Mains Current in Milli Amps. At 240 V	Power Factor	THD
112642	BZRSQL 36W GZ1 WH	240	36W	160	0.95	<10%
112643	BZRSQL 36W GZ1 NW	240	36W	160	0.95	<10%
112644	BZRSQL 36W GZ1 CW	240	36W	160	0.95	<10%

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRE Making the difference</p>	DRAWN	KPM	06-07-2016	FOR –
	CHECKED	SP		REV - 0 DATE-22-08-2016
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BZRSQL 36W GZ1 WH - 001