




2' x 2' RECESS LED LUMINAIRES
"SKYLUX"
 BZRSQL 36W GZi WH / NW / CW

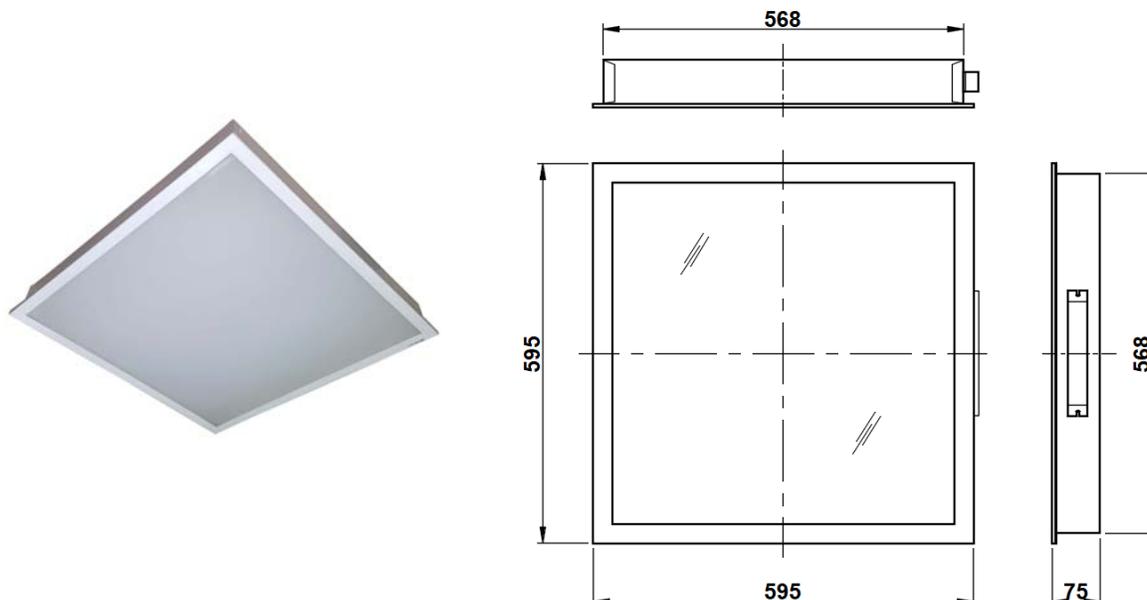

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

Recess mounting LED luminaire suitable for interior illumination of:

- Commercial complexes, Showrooms,
- Airport lounges, computer centers,
- Banks, Hospitals, Conference halls,
- Design offices, Control rooms, Laboratories, etc.

Specification

- CRCA sheet housing comprising of LED's connected in series parallel.
- Luminaire is available with different color temperature: White (WH): 5700K ±300K
 Neutral White (NW): 4000K ±275K
 Cool White (CW): 6500K ±500K
- Opal diffuser fixed in separate CRCA sheet frame.
- Opal diffuser frame is held in with housing by screws for easy maintenance.
- Driver: Constant current output driver, operating range 150–265V AC supply voltages.
- Finish: Housing white powder coated. (RAL9016)
- Ingress protection: IP20

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	Mains Current in Milli Amps. At 240 V	Power Factor
112801	BZRSQL 36W GZi WH	240	36W	160	≥ 0.95
112802	BZRSQL 36W GZi NW	240	36W	160	≥ 0.95
112803	BZRSQL 36W GZi CW	240	36W	160	≥ 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p>BAJAJ LUMINAIRES Making the difference</p>	DRAWN	KPM	08-03-2018	FOR -
	CHECKED	SD		REV - 1 DATE-08-03-2018
	APPROVED	DVRS		DRG. No
	DATA SHEET RELEASED ON DT-			BZRSQL 36W GZi WH - 001
BAJAJ ELECTRICALS LIMITED LUMINAIRES BU, 601, RUSTOMJEE ASPIREE, SION, MUMBAI-400 022.				* E-mail : luminaires@bajajelectricals.com