




2' x 2' SURFACE LED LUMINAIRES  
 "SKYLUX"  
 BZSSQL 36W WH / NW

SURFACE MOUNTED LED LUMINAIRE

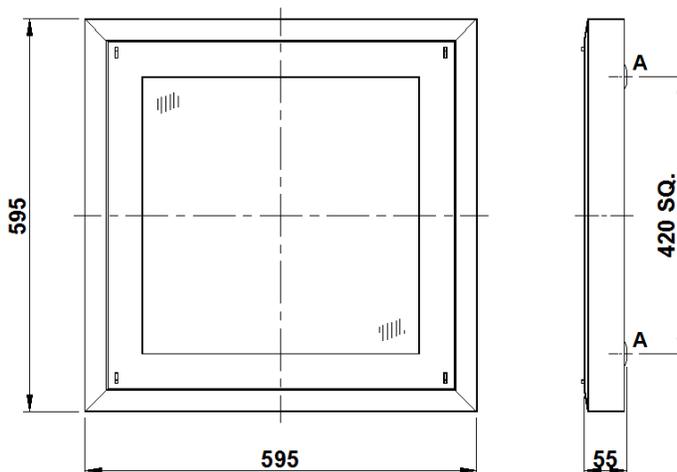

A = 4 DIA EMBOSSED HOLE, 4 Nos.

NOMINAL DIMENSIONS IN mm Tolerance +/-5

**Application**

Surface mounting LED luminaire suitable for interior illumination of:

- Commercial complexes, Showrooms,
- Airport lounges, computer centers,
- Banks, Hospitals, Conference halls,
- Design offices, Control rooms, Laboratories, etc.

**Specification**

- CRCA steel sheet housing comprising of White (WH) / Neutral White (NW) LED's connected in series parallel.
- Opal acrylic diffuser fixed in separate CRCA sheet steel frame.
- Opal acrylic diffuser frame is held in with specially designed trigger locks and it can be suspended for easy maintenance.
- Driver: Constant current output driver, operating range 150 – 265V AC supply voltages.
- Finish: Housing white powder coated. (RAL 9016)

**Electrical Data**

Product Code	Cat. Ref.	System Wattage (W)	Nominal Voltage (V)	Mains Current in Milli Amps. At 240 V	Power Factor
111180	BZSSQL 36W WH	36W	240	155	0.95
111181	BZSSQL 36W NW	36W	240	155	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRES</b> Making the difference</p>	DRAWN	KPM	28-06-2012	FOR –
	CHECKED	SD		REV - 1 DATE-15-09-2014
	APPROVED	SC		DRG. No
	DATA SHEET RELEASED ON DT-			<b>BZSSQL 36W WH/NW - 001</b>