




"GREEN LED"

BCLAB 20W

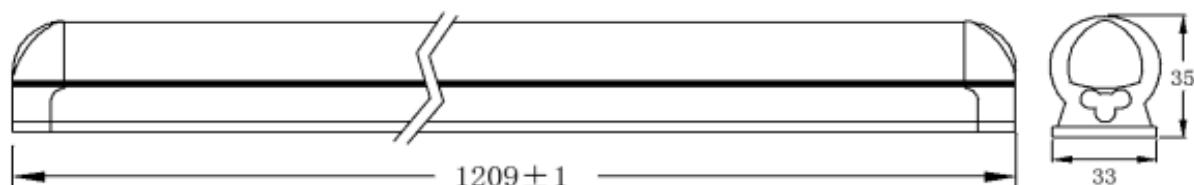

NOMINAL DIMENSIONS IN mm Tolerance +/-5

### Application

- Passage, corridor lighting (ESP. IT, ITES)
- Premium & Mini offices,
- Shopping malls,
- Reception areas,
- Hospitality industry, etc.

### Specification

- Extruded aluminium housing fitted with engg. Plastic end caps.
- Opal diffuser provides smooth light distribution.
- LED populated on PCB comprising of LED's connected in series parallel.
- Luminaire is available with color temperature: White (WH) : 6500K ±300K
- Driver: Constant current output driver, operating range 150–275V AC supply voltages.
- Ingress protection: IP20

### Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V)	System Wattage (W)	Mains Current in Milli Amps. At 240 V	Power Factor
112785	BCLAB 20W	240	20W	87	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	KPM	01-02-2017	FOR –
	CHECKED	AS		REV - 0 DATE-14-06-2017
	APPROVED	DVRS		DRG.No
	DATA SHEET RELEASED FOR MARKETING			<b>BCLAB 20W - 001</b>
BAJAJ ELECTRICALS LIMITED LUMINAIRES BU, 601, RUSTOMJEE ASPIREE, SION, MUMBAI-400 022.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>