




## RETAIL LIGHTING

## "Flexitron Viva"

BLTRU 40W WH / WW / NW VIVA I

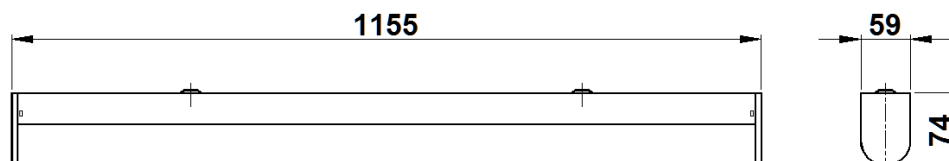

NOMINAL DIMENSIONS IN mm Tolerance +/-5

## Application

- Passage, corridor lighting (ESP. IT, ITES)
- Premium & Mini offices
- Shopping malls
- Reception areas
- Hospitality industry

## Specification

- CRCA steel sheet housing comprising of LED's connected in series parallel.
- LED make – EVERLIGHT
- Luminaire is available with different color temperature: White (WH) : 5700K  $\pm$ 300K  
Neutral White (NW): 4000K  $\pm$ 275K  
Warm White (WW): 3000K  $\pm$ 250K
- Opal diffuser is supported by a pair of engg. Plastic end plates which facilitate easy removal for maintenance.
- Driver: Constant current output driver, operating range 140–270V AC supply voltages.
- The luminaire is suitable for wall or ceiling mounting.
- Finish: White powder coated (RAL 9016)

## Electrical Data

Product Code	Cat. Ref.	System Wattage (W)	Nominal Voltage (V)	Mains Current in Amps. At 240 V	Power Factor
169846	BLTRU 40W WH VIVA I	40W	240	0.175	0.95
169847	BLTRU 40W WW VIVA I	40W	240	0.175	0.95
169848	BLTRU 40W NW VIVA I	40W	240	0.175	0.95

Data subject to variation due to change/improvement in the design, materials and processes.

 <b>BAJAJ LUMINAIRE</b> <i>Making the difference</i>	DRAWN	KPM	11-05-2016	FOR –
	CHECKED	SD		REV - 0 DATE-20-06-2016
	APPROVED	DVRS		DRG.No
	DATA SHEET RELEASED ON DT-			<b>BLTRU 40W WH VIVA I - 001</b>
<b>BAJAJ ELECTRICALS LIMITED</b> 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>