




"GREEN LED"

BCLAB 40W

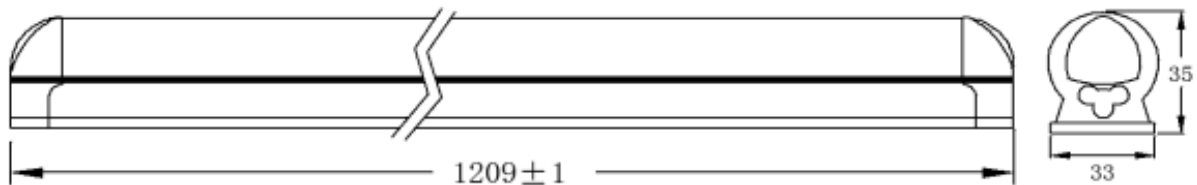

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Passage, corridor lighting (ESP. IT, ITES)
- Premium & Mini offices,
- Shopping malls,
- Reception areas,
- Hospitality industry, etc.

Specification

- Extruded aluminium housing fitted with engg. Plastic end caps.
- Opal diffuser provides smooth light distribution.
- LED populated on PCB comprising of LED's connected in series parallel.
- Luminaire is available with color temperature: White (WH): 6500K ±300K
- Driver: Constant current output driver, operating range 150–275V AC supply voltages.
- Ingress protection: IP20

Electrical Data

| Product Code | Cat. Ref. | Nominal Voltage (V) | System Wattage (W) | Mains Current in Milli Amps. At 240 V | Power Factor |
|--------------|-----------|---------------------|--------------------|---------------------------------------|--------------|
| 112786 | BCLAB 40W | 240 | 40W | 175 | 0.95 |

Data subject to variation due to change/improvement in the design, materials and processes.

| | | | | |
|--|-----------------------------------|------|------------|---|
| | DRAWN | KPM | 01-02-2017 | FOR – |
| | CHECKED | AS | | REV - 0 DATE-14-06-2017 |
| | APPROVED | DVRS | | DRG.No |
| | DATA SHEET RELEASED FOR MARKETING | | | BCLAB 40W - 001 |
| BAJAJ ELECTRICALS LIMITED LUMINAIRES BU, 601, RUSTOMJEE ASPIREE, SION, MUMBAI-400 022. | | | | * E-mail : luminaires@bajajelectricals.com |