
SUSPENDED MOUNTING LED UP/DOWN LUMINAIRE



BZSUDL 40W 4F3U7D WH

40W LED Up/down Luminaire

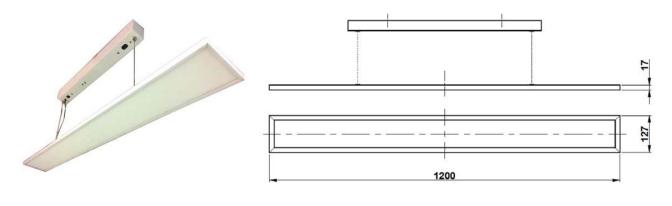

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

Suspended mounting LED luminaire suitable for interior illumination of:

- Commercial offices, Board Rooms,
- COE cabins, Banks, Computer centers, etc.

Specification

- Energy efficient suspended mounted up/down LED flat panel in White (WH) color with sideemitting LED array.
- Luminaire is available with color temperature: White (WH) : 5700K
- Extruded aluminium housing contains LED source. Has a high efficiency PS diffuser, which provides higher lumen package (30% up and 70% down ratio) to create uniform & diffuse appearance.
- LED Driver: Non-integral highly efficient constant current electronic driver, input operating voltage range 140–265V AC; provided with overvoltage, short circuit protections.
- Mounting type: Suspension mounting through 'Y' Type suspension.
- Finish: White powder coated.
- Ingress Protection : IP20

Electrical Data

Product Code	Cat. Ref.	Nominal Voltage (V) & Freq. (Hz.)	System Wattage (Watts)	Mains Current in Amps. At 240 V	Power Factor
112758	BZSUDL 40W 4F3U7D WH	230V, 50Hz	40	0.18	>0.95

Data subject to variation due to change/improvement in the design, materials and processes.

	DRAWN	KPM	20-12-2016	FOR –				
	CHECKED	DVRS		REV - 0	DATE-16-01-2017			
Making the difference	APPROVED	DVRS		DRG. No				
Making the unterence	DATA SHEET RELEASED ON –			BZSUDL 40W 4F3U7D WH-01				
BAJAJ ELECTRICALS LIMITED 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010. * E-mail : <u>luminaires@bajajelectricals.com</u>								